

1/4

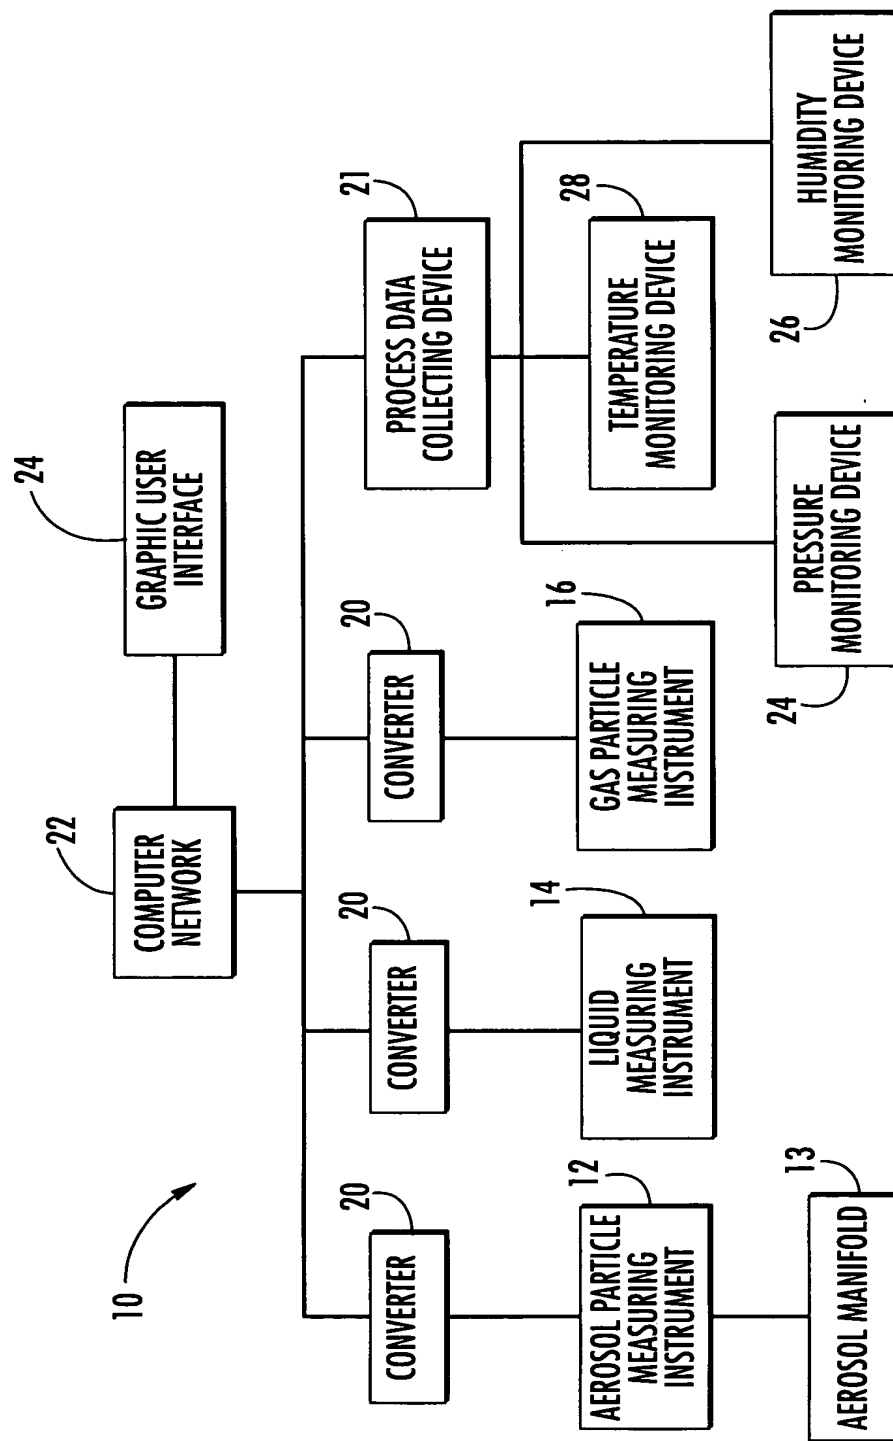


FIG. 1

2/4

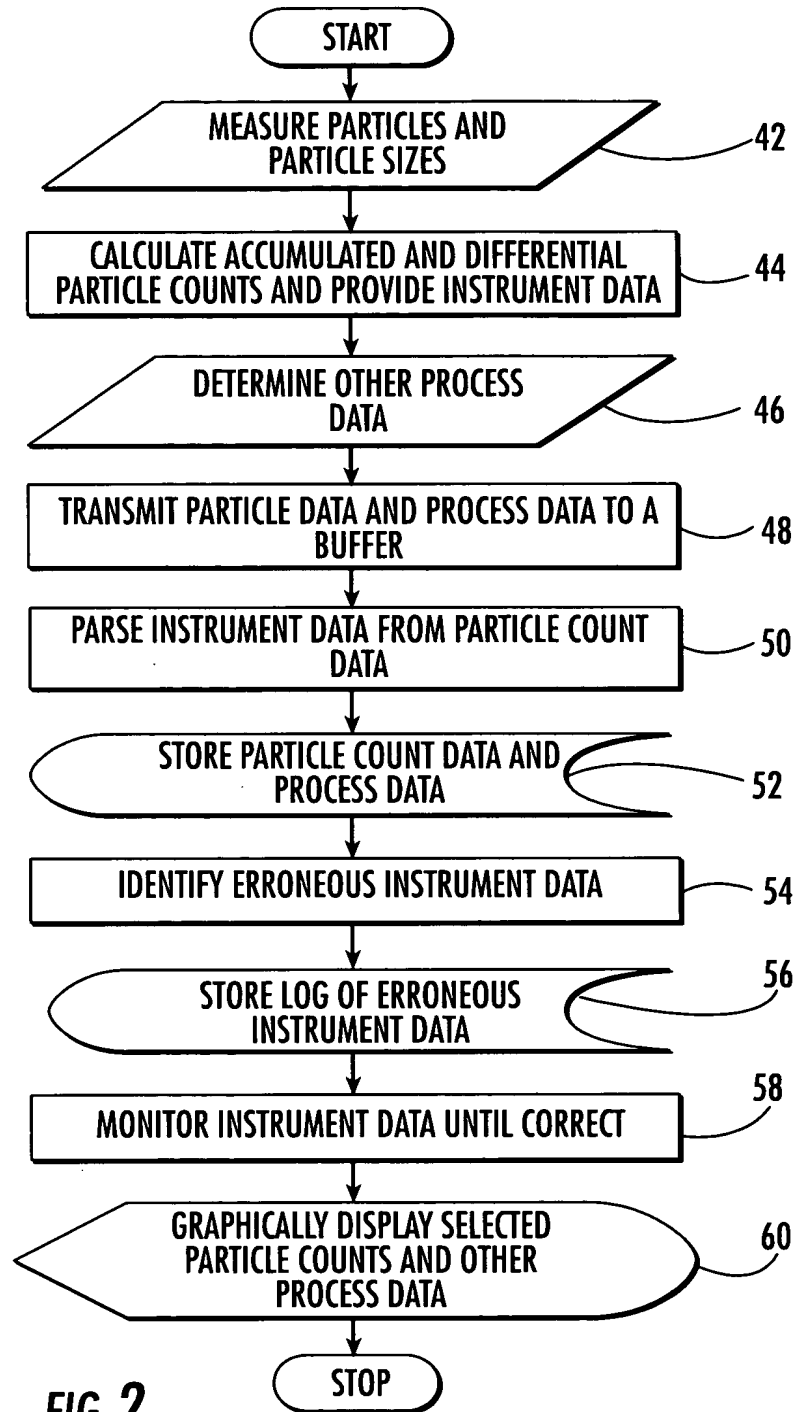


FIG. 2

3/4

PMS Driver Configuration						
Main Save						
Driver Configuration / Settings						
Particle Counter Information:						
PMS Device Information						
	DEVICE NAME	IP ADDRESS	AREA	BUILDING	COM PORT	DEVICE TYPE
▶	B40 LPS	150.2.3.40	WFR	40	5	A
	AREA BLPS	150.2.3.63	CW	65	6	A
	EPI CLEANROOM	150.2.3.70	EPI	15	8	A
	AREA DLPS	150.2.3.62	PW	65	7	A
	EPI BAY 4.5	150.2.3.68	EPIR	15	9	A
*						

Differential Settings:		Accumulation Settings:	
<input type="checkbox"/> 0.10 Microns	<input type="checkbox"/> 0.3 Microns	<input checked="" type="checkbox"/> 0.10 Microns	<input type="checkbox"/> 0.3 Microns
<input type="checkbox"/> 0.15 Microns	<input type="checkbox"/> 0.5 Microns	<input type="checkbox"/> 0.15 Microns	<input type="checkbox"/> 0.5 Microns
<input type="checkbox"/> 0.2 Microns	<input type="checkbox"/> 0.7 Microns	<input type="checkbox"/> 0.2 Microns	<input type="checkbox"/> 0.7 Microns
<input type="checkbox"/> 0.25 Microns	<input type="checkbox"/> 1.0 Microns	<input type="checkbox"/> 0.25 Microns	<input type="checkbox"/> 1.0 Microns

Misc Configuration:		
Keep Error Logs for	Scada Node Name:	Record Volt / Airflow on Port #:
<input type="text" value="5"/> days	<input type="text" value="865_S3"/>	<input type="text" value="10"/>

FIG. 3

4/4

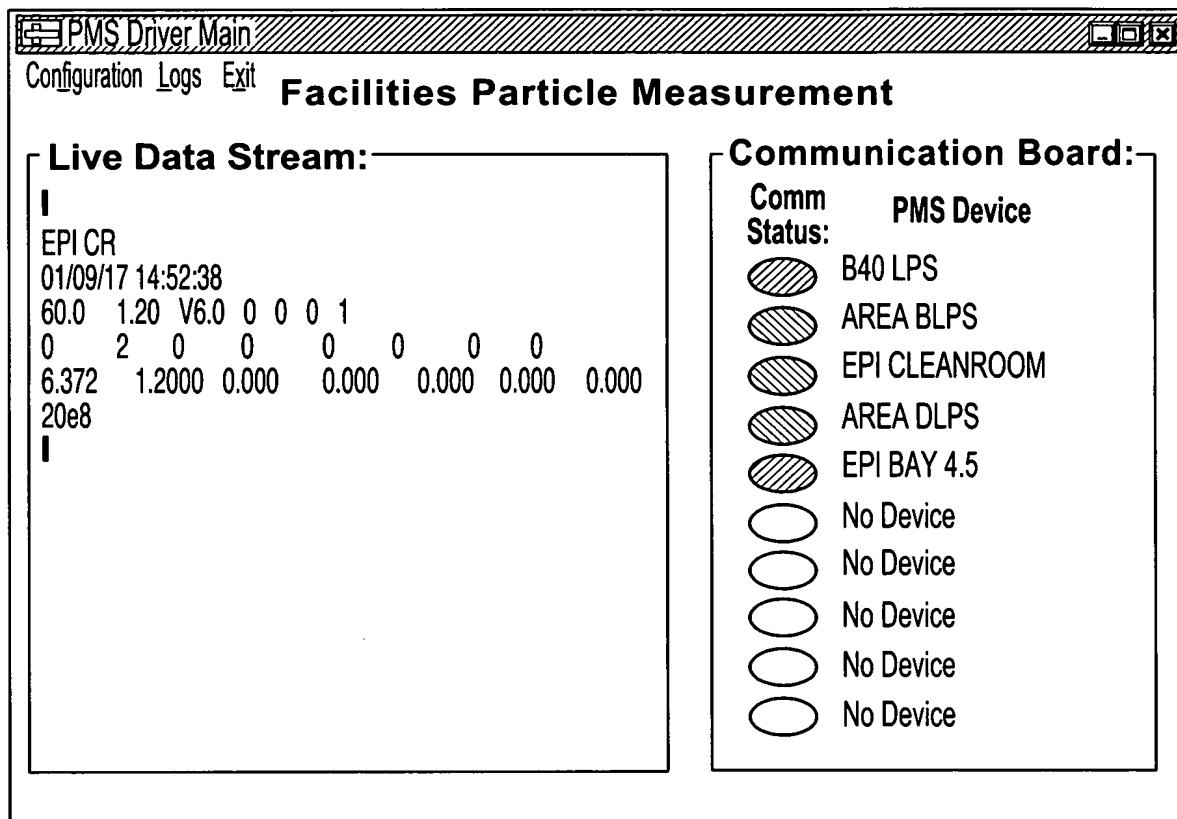


FIG. 4